

Mechanical specifications

Length	1800 mm	70.87 in
Width	380 mm	14.96 in
Depth	332 mm	13.07 in
⁴⁾ Weight	12.25 kg	27 lbs
Wind Area		
Front	0.684 m ²	7.39 ft ²
Side	0.598 m ²	6.45 ft ²
Rated Wind Velocity (Safety factor 2.0)		
	>235 km/hr	>146 mph
Wind load @ 100 mph (161 km/hr)		
Front	993 N	223.3 lbs
Side	872 N	196.1 lbs

Antenna consisting of aluminum alloy with brass feedlines covered by a UV safe fiberglass radome.

Mounting & Downtilting:

Mounting brackets attach to a pipe diameter of Ø50-102 mm (2.0-4.0 in).

Mounting bracket kit #21699999

Downtilt bracket kit #21699999

The downtilt bracket kit includes the mounting bracket kit.

Electrical specifications

Frequency Range	806-960 MHz
Impedance	50Ω
³⁾ Connector	NE, E-DIN
¹⁾ VSWR	≤1.4:1
Polarization	Vertical
¹⁾ Gain	14.5 dBd
²⁾ Power Rating	500 W
¹⁾ Half Power Angle	
H-Plane	63°
E-Plane	10°
¹⁾ Electrical Downtilt	0°
¹⁾ Null Fill	10%
Lightning Protection	Direct Ground

¹⁾ Typical Values

²⁾ Power Rating limited by connector only.

³⁾ NE indicates an elongated N Connector.

E-DIN indicates an elongated DIN Connector.


⁴⁾ The antenna weight listed above does not include the bracket weight.

Improvements to mechanical and/or electrical performance of the antenna may be made without notice.


LPA-80063/6CF ____

When ordering, replace " ____ " with connector type.

Radiation-pattern¹⁾

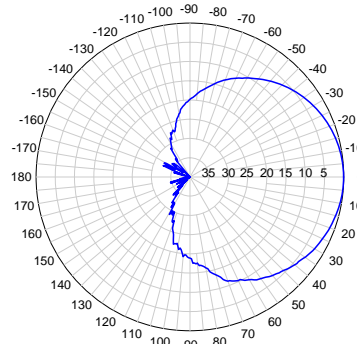

Horizontal

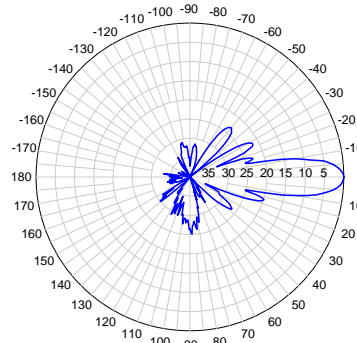

Vertical

Featuring upper side lobe suppression.

Radiation patterns for all antennas are measured with the antenna mounted on a fiberglass pole.

Mounting on a metal pole will typically improve the Front-to-Back Ratio.

CF Denotes a Center-Fed Connector.

806-960 MHz



Amphenol Antel's Exclusive 3T (True Transmission Line Technology) Antenna Design:

- True log-periodic design allows for superior front-to-side characteristics to minimize sector overlap.
- Unique feedline design eliminates the need for conventional solder joints in the signal path.
- A non-collinear system with access to every radiating element for broad bandwidth and superior performance.
- Air as insulation for virtually no internal signal loss.

Every Amphenol Antel antenna is under a five-year limited warranty for repair or replacement.

Antenna available with center-fed connector only.

